

LED Track Luminaires

Pacto series

PACTO series feature more concentrated & directed light on the target surface. Light-weighted, flexible illumination. Maximum power is available with lumen packages from 2500 to 3200lm.

Pinpoint illumination thanks to specially designed lens technology.

Available for the international track rails(standard 4wires, 3-phases; DALI dimmable; 4wires, 1-phase or 6wires, 3-phases).

Various beam angles(15, 28, 43 degree) & soft light with less glare offer to fulfill the requirement of different lighting applications.



PAT28-80402P20L

Application

Retails, Hypermarket, Supermarket, Workshops, Office, Architecture, Stores

Key Facts & Features

- Power Delivery from 2500 to 3200 lm
- High Thermal Dissipation Performance
- Flexible illumination with 0 to 90 tilting and 0 to 355 rotation
- CCT 3000 / 4000 / 5000K
- Suspension / Surface Installation
- Flicker Free driver
- IP20 rating
- CRI : RA80, 90, 97



Ordering Information

Example: PAT28-80402P20L

PA	T	28	80	40	2P	43	L
Model	Design	Wattage	Diameter	CCT	Mounting	Beam Angle	Lens
PA Pacto	T Track	28 28Watt	80 Ø80mm	40 4000K	2P Adaptor 2P	43 43 degree	L PMMA
VE Vexillum		42 42Watt	110 Ø110mm	30 3000K 50 5000K	4P Adaptor 4P	28 28 degree 15 15 degree	

Pacto series

Specifications

General


- Light-weighted design
- Easy maintenance with simple connection, tool-less
- Soft Light with less glare
- Easy angle adjustment
- IP20



Lens




Reflector

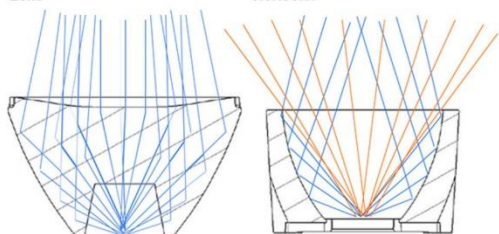


- Minimize light loss through lens application

Classification		Unit	SPECIFICATIONS	
General	Power Consumption	W	28	42
	Dimension	-	80(W) x 233(H)mm	
	Mounting	-	Multi Adaptor 2P	
	Working Temp.	-	-4°F(-20°C) ~ +122°F(+50°C)	
	IP Rate	-	IP20	
Optical	Luminous Flux	lm	≤ 2,500	≤ 3,200
	Color Temp.	K	3000, 4000, 5000	
	CRI	Ra	≤ 80	
	Beam Angle		15, 28, 43	
Electrical	Luminous Efficacy	lm/W	≤ 90	
	Voltage Range	Vac	220-240 / 1-Phase	
	Frequency Range	Hz	50 ~ 60	
	Power Factor	PF	90% over	
	Efficiency	%	90% over	
	THD	%	<20	


Beam Distribution & Dimension



[43]



[Cone Diagram]

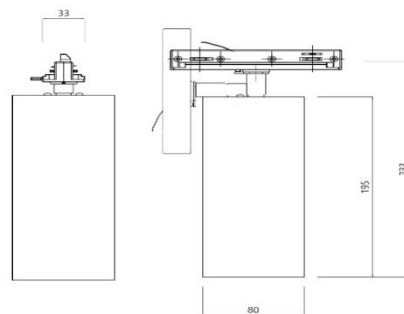

[W80 x H233]

Applications

